

2018 - 2019

UPLIFTING COMPANY

AUTOP **STENHOJ**



TESTNA OPREMA ZA TESTIRANJE PODVOZJA

- Naprave za nastavitve žarometov - regloskopi

KOCH

PRODAJA IN SERVIS OPREME

KOCH, SERVISNA OPREMA, d.o.o.
Špruha 42, SI-1236 Trzin

prodaja@koch.si

Tel.: +386 1 56 44 770
Fax: +386 1 56 44 772

aleksander.presekar@koch.si

Lightmaster MC17

Headlight tester



Application

- Setting of headlights
- Repair and maintenance
- Test
- General inspection

Description:

- CMOS-camera based system for all types of headlights (LED, LED-Matrix, Xenon, H4,H7, ...) from motorcycles up to trucks
- Digital, interactive 7" touch screen
- Large-surfaced Fresnel lens for simple and quick positioning in front of the vehicle
- Turnable, black anodized column for the optical box
- Laser viewer with battery on the column for adjustment of the perspective to the vehicle
- Electronic tilt sensor to compensate for uneven SEP parking space
- Processor assisted system with large flash memory
- USB port for software updates and memory of measuring station data
- Large Battery (Li-ion) for wireless and long usage
- Battery charger
- Measuring station compensating software (patented) for uneven vehicle parking spaces
- Manages up to 4 different work bays with each 10 different measuring station zones for different wheel bases
- Very stable carriage, available with rubber wheels or rail system

Versions:

- Available either with rubber wheels or a rail system
- Rails on floor
- Rails inground
- Steel wheels for rails of other manufacturers

Optional extras:

- Rail extension set
- Push handle
- Set of rails
- Display cover
- Steel wheels for rails of other manufacturers




Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

Technical data

Measurement range above	0 – 800 mm / 10 m (0...8,0 %)
Measurement range below	0 – 800 mm / 10 m (0...8,0 %)
Measurement left	0 – 1,000 mm / 10 m (0...10%)
Measurement right	0 – 1,000 mm / 10 m (0...10%)
Light intensity	125,000 cd
Illumination intensity	200 lx
Deviation of intensity	+/- 5 %
Measurement distance	100...500 mm
Ambient temperature	5 °C – 45 °C
Relative humidity	Maximal 80 %
Li-ion-Akku for cordless use	7.4 V / 13,000 mAh
Li-ion-Akku power supply unit	8.5 V / 2 A

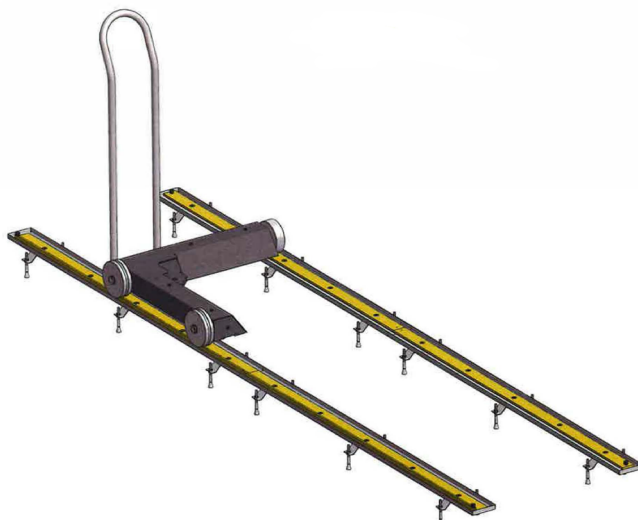

Push handle



Display cover



Touch Display 7"



Display cover with mirror

Lightmaster BE16

Headlight tester



Application

- Setting of headlights
- Repair and maintenance
- Test
- General inspection

Description:

The Lightmaster BE16 is a headlight tester with mirror sight and an analogue luxmeter. The column height is 1,600 mm. It is suitable for bike / cars and trucks. The Lightmaster BE16 is equipped with rubber rollers. The optics box is height-adjustable by means of precise, quiet running shoes and is held in position behind the cover plate by a spring; an applied centimeter scale serves here for precise positioning against the headlight. The Lightmaster has a setting wheel for the manufacturer's pre-set inclination dimensions in the headlight. The Lightmaster BE16 has a round lever as a movement aid.

Versions:

- Headlight tester for motorcycles, passenger cars, van and trucks
- Mirror viewer
- Analog luxmeter
- Value setting device
- Column height 1,600 mm

Optional extras:

- Rail extension set



Scan the QR-Code
for detailed product information.


Further Information on
www.autopstenhoj.com

Technical data

Measurement range above	0 % bis 4 %
Measurement range below	0 % bis 4 %
Measurement left	+/- 10 cm an 10 m
Measurement right	+/- 10 cm an 10 m
Light intensity	0 - 240,000 lux / 25 m
Illumination intensity	200 lx
Deviation of intensity	+/- 5 %
Measurement distance	100...500 mm



Lightmaster BE16

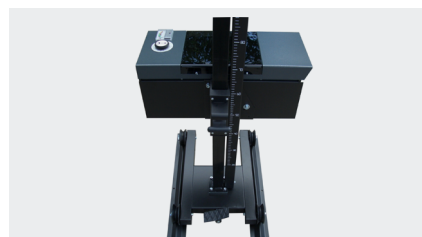

Lightmaster BE16



Optional extra: rail extension set