

PRESEKAR

PRODAJA IN SERVIS OPREME

Špruha 42, 1236 Trzin, Slovenia

Tel.: +386 1 56 44 770

Mob.: +386 41 638 609

Fax: +386 1 56 44 772

www.presekar.eu

prodaja@presekar.com

aleksander.presekar@presekar.com

TOOLS THAT MAKE THEIR MARK.



TOOL CATALOGUE

2023

WHEELS / TYRES

Wheels / tyres

Impact sockets

293–295

Service jacks and jack stands

296–299

Wheel / tyre tools

299–303

Impact sockets



V6311, EAN 4047728**077798**


Impact socket · TESLA

- 22.2 mm hexagon or 7/8"
- 21 mm wheel nuts can deform and expand plastically due to weather conditions



12⁵ 1/2"

NEW




V4309, EAN 4047728**043090**

Impact socket · MERCEDES BENZ

- Operating wheel bolts with a MERCEDES-BENZ special profile
- For the following models:
 - C-Class · GLK (W204)
 - E-Class (W211 · W212 · W207)
 - SLK (W172)
 - M-Class (W164 · W166)
 - CL-Class (W216)
 - S-Class (W221, W222)
 - MAYBACH
- For impact operation



12⁵ 1/2"



V6309, EAN 4047728**075534**


Impact socket set

- Operation of damaged 19 mm FORD wheel nuts
- For e.g.: FORD B-Max · C-Max · Fiesta · Focus · Mondeo · Transit
- Contents:
 - 18.5 mm impact socket for wheel nuts with missing chrome cap
 - 19.5 mm impact socket for wheel nuts with deformed chrome cap

The 19 mm FORD wheel nuts can deform and expand due to weather conditions. It is therefore no longer possible to use a conventional 19 mm socket. Likewise, the chrome-plated protection cap of these wheel nuts often goes missing or is damaged. Our solution: intermediate sizes with 18.5 mm and 19.5 mm inside hexagon profiles.



12⁵ 1/2"




V5930, EAN 4047728**059305**


Impact socket · long

- Damage-free operation of wheel bolts by rotating plastic sleeve
- For impact operation

Size 17 mm



Comparison of standard socket to extra long socket

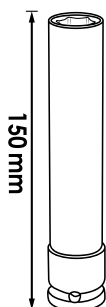

V5931, EAN 4047728**060318**


Impact socket · long

- Damage-free operation of wheel bolts by rotating plastic sleeve
- For impact operation

Size 19 mm



Comparison of standard socket to extra long socket

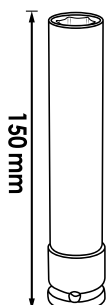


Impact sockets



V6312/10, EAN 4047728077804

Impact socket set

- Damage-free operation of wheel bolts by rotating plastic sleeve
- Set with all required sockets
- For impact operation




NEW

V2522, EAN 4047728025225

Impact socket set

- For impact operation




VIGOR No.	mm	Size	EAN 4047728+
V2472	85	17 mm	024723
V2473	85	19 mm	024730
V2474	85	21 mm	024747

V2257, EAN 4047728022576

Impact socket set

- For impact operation





VIGOR No.	mm	Size	EAN 4047728+
V2471	85	15 mm	024716
V2472	85	17 mm	024723
V2473	85	19 mm	024730
V2474	85	21 mm	024747
V2475	85	22 mm	024754



V2481, EAN 4047728024815

Hydraulic aluminium service jack 1.35 tonnes

- Wheel change on the vehicle or repairs under the vehicle, for which a lifting platform is not necessary
- ± 10 kg

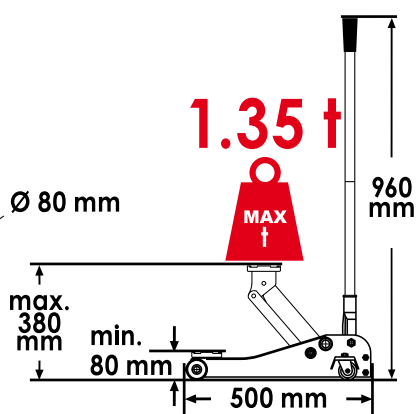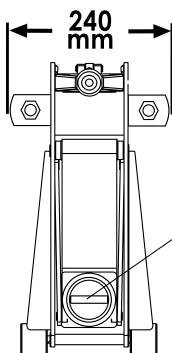

Aluminium – only 10 kg






VIGOR No.	Designation	EAN 4047728+
V2631	Fixed castor (pair)	026314
V2632	Swivel castor (pair)	026321
V2639	Hydraulic unit	026390
V2640	Rubber pad	026406


V6028, EAN 4047728060288

Hydraulic service jack 2 tonnes · ultra-flat

- Wheel change on the vehicle or repairs under the vehicle, for which a lifting platform is not necessary
- Solid rubber pad for firm hold
- Fast lift thanks to turbo-lift function
- Robust steel body - guarantees high quality
- Quiet castors made from Polyurethane
- ± 32 kg

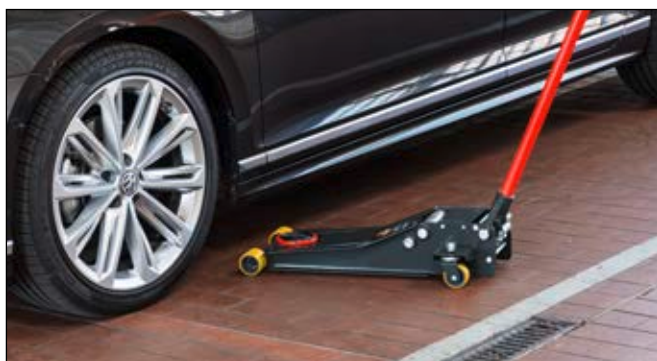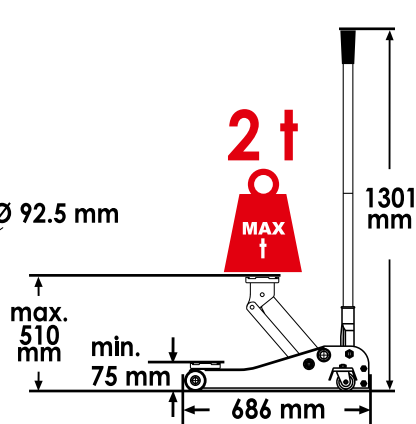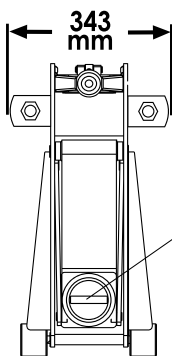

VIGOR No.	Designation	EAN 4047728+
V6028-1	Fixed castor (pair)	062503
V6028-2	Swivel castor (pair)	062497
V6028-3	Rubber pad	062480
V6028-4	Hydraulic unit for V6028	062473

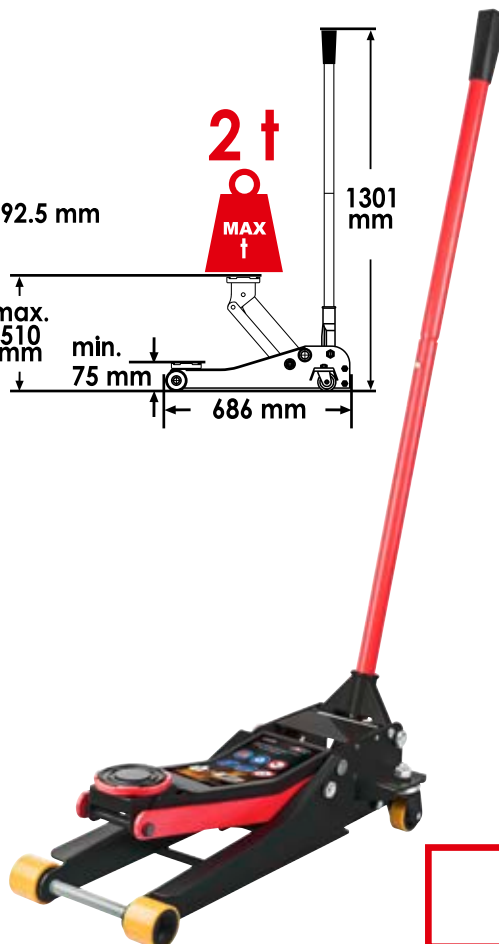


Service jacks and jack stands



V6031, EAN 4047728071109

Hydraulic service jack 2 tonnes · extra long

- Wheel change on the vehicle or repairs under the vehicle, for which a lifting platform is not necessary
- 42 kg

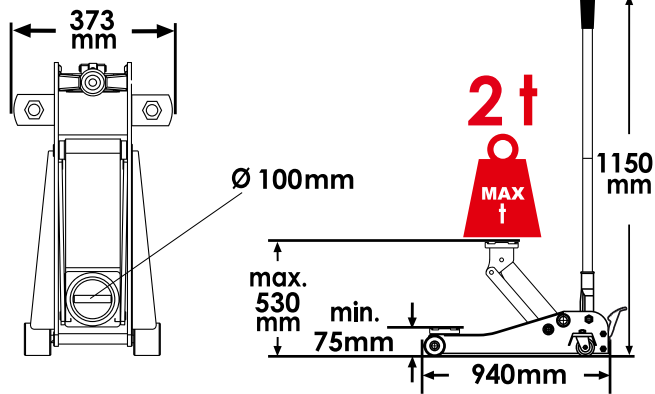


VIGOR No.	Designation	EAN 4047728+
V6031-1	Fixed castor (pair)	075879
V6031-2	Swivel castor (pair)	075886
V6031-3	Rubber pad	075893




V6029, EAN 4047728069786

Hydraulic service jack 3 tonnes

- Wheel change on the vehicle or repairs under the vehicle, for which a lifting platform is not necessary
- 31 kg
- Compact design
- Quiet castors made from Polyurethane

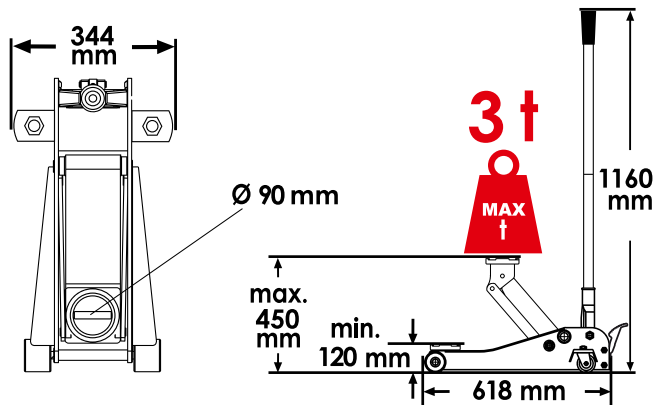

VIGOR No.	Designation	EAN 4047728+
V6029-1	Fixed castor (pair)	075855
V6029-2	Swivel castor (pair)	075848
V6029-3	Rubber pad	075862

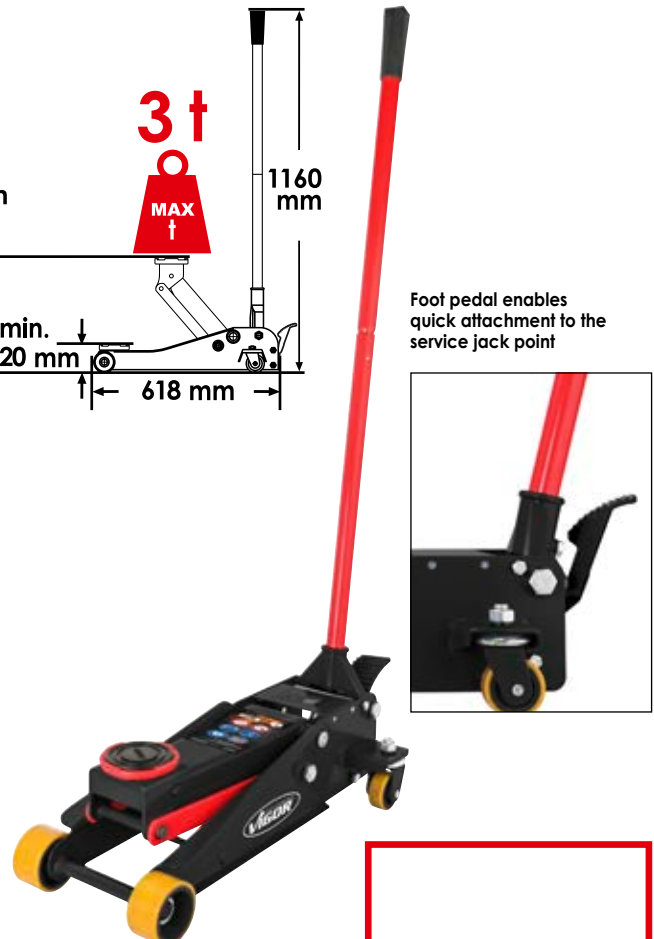


Foot pedal enables quick attachment to the service jack point



V2478, EAN 4047728**024785**

Hydraulic bottle jack 6 tonnes

- Vertical and horizontal applications
- ⚖️ 4.4 kg

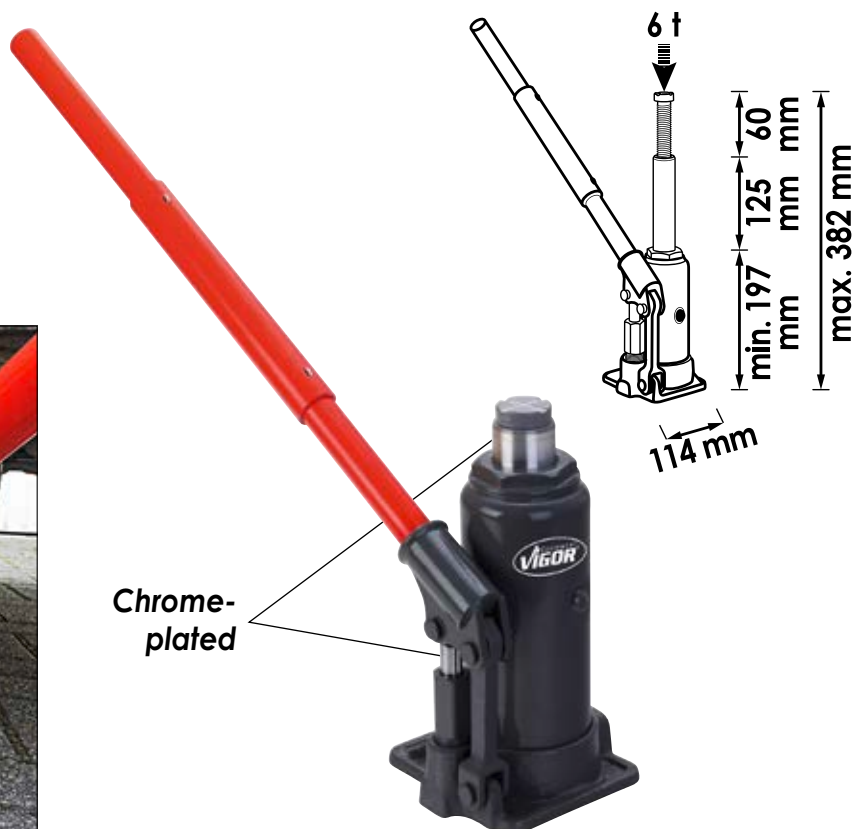

V2477, EAN 4047728**024778**

Jack stand set 3 tonnes

- ⚖️ 5.2 kg per pair
- Loading capacity: 3 tonnes
- Height 315 – 460 mm
- Depth: 230 mm



VIGOR No.	Designation	EAN	
V2762	Rubber pad	4047728+	027625


Service jacks and jack stands Wheel / tyre tools



V2648, EAN 4047728**026482**

Jack stand set 6 tonnes

- 11 kg per pair
- Loading capacity: 6 tonnes
- Height 370 – 575 mm
- Depth: 300 mm

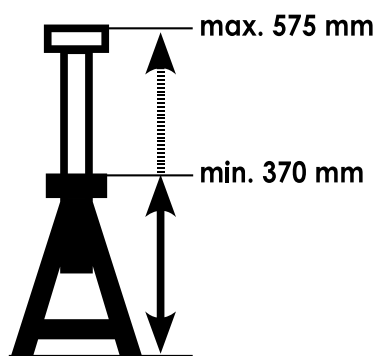

VIGOR No.	Designation	EAN	
V2762	Rubber pad	4047728+ 027625	



V3657, EAN 4047728**074520**

Balance weight pliers

- Loosening and fastening balance weights
- Jaw opening optimally adapted to the shape of the balance weights
- Cutting mode for cutting goods by the metre
- Special jaw shape enables the removal of balancing and striking weights



V3563, EAN 4047728035637

Tyre lever with plastic coating

- Installing and removing tyres on steel and especially on aluminium rims
- Length: 500 mm



Chrome-plated

With replaceable plastic coating fixed with screws, including screws



VIGOR No.	Designation	EAN 4047728+
V3615	Plastic coating with screws	036153

V2512, EAN 4047728025126

Balance weight remover set

- Removing balance weights from light-alloy rims on motorcycles and passenger cars
- Solvent resistant
- Blunt edges may be sharpened with a file
- Also suitable for removing labels and stickers
- No damage to surfaces




VIGOR No.	mm	mm	EAN 4047728+
V2513	19	500	025133
V2514	22	500	025140
V2515	25	500	025157
V2516	38	500	025164

V1657, EAN 4047728016575

Balance weight pliers

- Fastening, loosening and cutting balance weights

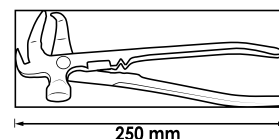

V1584, EAN 4047728015844

Tyre tread depth gauge

- Detecting wear patterns on tyres, brake blocks and brake pads
- Zero-setting in any position
- 3 V (CR 2032)–240 mAh

Maximum 27 mm



Large LCD display
Can be switched between
mm/inches


V1423, EAN 4047728014236

Tyre pressure gauge

- Quick tyre pressure check
- Small and handy
- Digital display
- Measuring ranges:
 - 0.15 – 7 bar
 - 2 – 99.5 PSI
 - 15 – 70 KPA
- 3 V (CR 2032) – 240 mAh



Automatic shut-off after 90 sec.

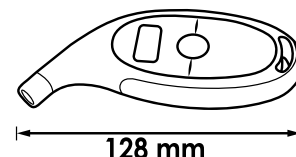

128 mm


Rubber hammer

- Loosening rusted rims during a wheel change



Plastic handle

Non-rebound due to steel-ball filling

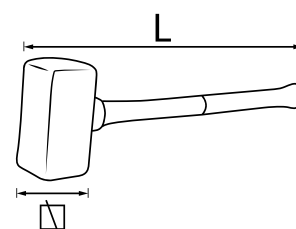


VIGOR No.	mm	l mm	kg	EAN 4047728+
V2235	50	500	2.5	022354
V2234	74	900	5	022347

V1571, EAN 4047728015714

Steering wheel level

- Alignment of the steering wheel during axle alignments and work around the steering column
- Quick installation
- Simple adjustment to the steering wheel
- Easy to read
- Universal use for passenger cars, vans and trucks
- Use of the steering wheel level prevents incorrect steering wheel positions
- An exact axle alignment should always be carried out using a calibrated alignment device

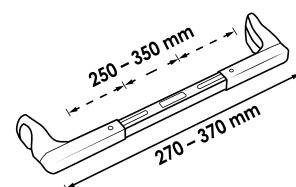

V7181, EAN 4047728**071819**

Tap and die set for wheel bolts and wheel nuts

- Damaged or rusty threads can result in incorrect torque values
- Repairing and cleaning of wheel bolts and wheel nuts with inside and outside thread
- Can be used directly on the vehicle
- TIN-HSS coated surface
- In plastic case
- Suitable for the thread sizes:
 - M 12x1.25 mm
 - M 12x1.5 mm
 - M 14x1.5 mm




Damaged or rusty threads can result in incorrect torque values

Inside thread



Outside thread

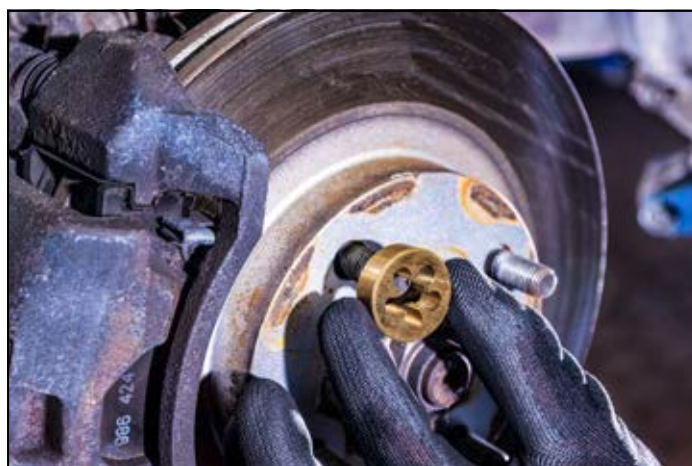

VIGOR No.	Designation	Design	EAN 4047728+	
V7181-1	Die · M 12 x 1.25 TIN		071840	
V7181-2	Die · M 12 x 1.5 TIN		071833	
V7181-3	Die · M 14 x 1.5 mm TIN		071826	
V7181-4	Hand tap · M 12 x 1.25 TIN		071864	
V7181-5	Hand tap · M 12 x 1.5 TIN		071857	
V7181-6	Hand tap · M 14 x 1.5 TIN		071871	



V7001, EAN 4047728**075060**

Universal rim lock removal set

- Malleable rim keys for loosening almost all rim locks
- Also for rim locks with clover leaf profile, among others
- Malleable rim keys adapt to the profile by hammer strike
- Can be used on both sides
- Multiple deformation of a key side not possible
- Contents:
 - 8 rim keys
 - 2 adapters
 - Socket □ 12.5 mm (1/2") - size 24 mm
 - Impact body
 - Centring pin
 - Hand guard trim



V7001/4, EAN 4047728**075336**

Rim key set

- Key set with Ø 13 mm and 15 mm can be used on both sides
- For universal rim lock removal set V7001
- Material: AHSS (carbon steel)

